



Valves

Handling the world's dry bulk solids®

VORTEX® 2-WAY SEAL TITE™ DIVERTER

The Vortex® 2-Way Seal Tite™ Diverter is designed for use in gravity flow applications where material can be diverter from one source to either of two destinations. The Seal Tite™ Diverter offers a removable access door for replacement of blade and shaft seals. All internal ledges have been eliminated to promote cleanliness. The Seal Tite™ Diverter's superior design promotes efficiency, durability, and long service life.


Vortex® 2-Way Seal Tite™ Diverter Features

- Positive Seal of Dust and Fine Powders
- Blade Seal Protected from Abrasion
- Access Door for Internal Inspection, Cleaning, or Maintenance
- Easy Installation and In-Place Maintenance
- Air Cylinder Model Includes Magnetic Piston



Valve Specifications

Size/Bore Options	4" to 30" Diameter Round, Square, or Rectangular
Media	Powder, Pellets, Granulars
Connection Options	SVC Standard Flange, ANSI, DIN, JIS, or Custom Flanges
Media Temperature	Up to 180°F continuous to 250°F intermittent service, Modifications allow up to 400°F continuous to 450°F intermittent service
Media Pressure	0 psig, Gravity Flow Only
Metal Construction Options	304 or 316L Stainless Steel, and Carbon Steel
Seal/Seat Material Options	Nylon, PET, UHMW, Glass Filled Teflon, Natural Rubber, Kryptane, and/or Silicon Rubber
Drive/Actuation Options	Double Acting Air Cylinder with Solenoid Operated Air Control Valve, Electric Actuator, or Hand Lever
Position Confirmation	Magnetic Reed Switch, Proximity Switch, or Mechanical Switch
Compliance/Approvals	CE, ATEX, FDA
Industry Use	Plastics, Petrochemicals, Chemicals, Foods, Minerals, Textiles, Agriculture

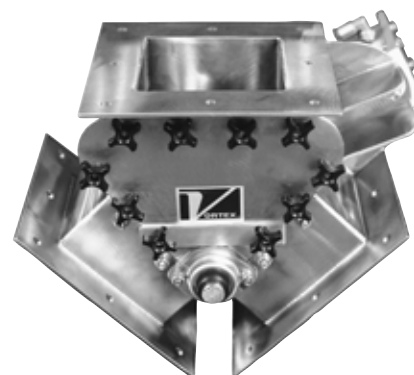

Application Specific Modifications

S	Material contact is 316L stainless steel.
HT3	Modifications are made allowing up to 250°F continuous to 300°F intermittent service.
HT4	Modifications are made allowing up to 400°F continuous to 450°F intermittent service.
CIP	Access panel and fasteners allow for quicker access to the interior of the valve for more frequent inspection, cleaning or sanitation.
RT	Round transitions with SVC bolt hole pattern are mounted to the inlet and two outlets of the valve.
RTP	Round transitions with ANSI, DIN, or JIS bolt hole pattern are mounted to the inlet and two outlets of the valve.
45 / 30	The angle the outlets are offset (45 or 30) degrees.
KS	Kryptane blade seal for more abrasive materials.