




## VORTEX® 3-WAY FLEX TUBE DIVERTER™ DIMENSIONAL INFORMATION

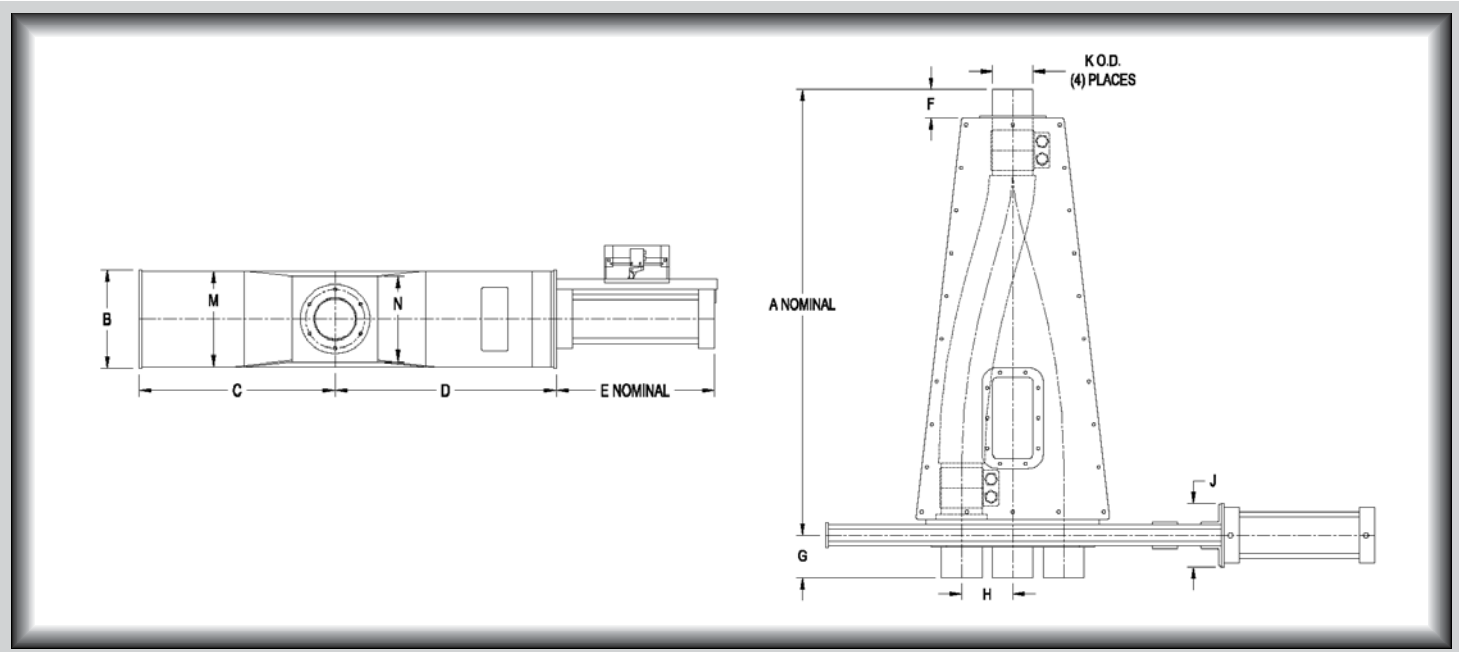

MODEL	TUBE SIZE	A	B	C	D	E	F	G	H	J	K	M	N	WT (Lbs)
T2-3(XX)Y	2	30 3/8	7 1/4	10 3/4	13	9 3/4	3	4 1/8	2 1/2	5	2	7 1/4	5	100
T2.5-3(XX)Y	2 1/2	36 1/4	8 7/8	13 1/8	15 7/8	14 3/8	3	5 1/4	3 1/2	6 1/4	2 1/2	8 5/8	6 5/8	130
T3-3(XX)Y	3	35	8 7/8	13 1/8	15 7/8	14 3/8	2 7/8	4 1/4	3 1/2	6 1/4	3	8 7/8	6 5/8	130
T4-3(XX)Y	4	44	9	18 3/8	20 3/4	14 3/4	2 5/8	4 1/8	5	6 1/4	4	9	7 1/2	160
T5-3(XX)Y	5	48 3/8	10 5/8	21 1/8	24 5/8	17 3/4	3 5/8	5 1/4	6	7 1/4	5	10 5/8	9 1/8	200
T6-3(XX)Y	6	72	11 1/4	25 1/4	27 3/4	19 3/4	3 7/8	5 1/8	7	6 3/4	6	11 1/4	10	260
T8-3(XX)Y	8	86 3/4	13 1/4	36 1/2	38 1/4	25 7/8	3 7/8	9 1/4	10	15 3/8	8	14	13 1/8	320

MODEL	PIPE SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N	WT (Lbs)
T2-3(XX)Y-P*	2	36 1/4	8 7/8	13 1/8	15 7/8	14 3/8	3	5 1/4	3 1/2	6 1/4	2 3/8	3	8 5/8	6 5/8	130
T2.5-3(XX)Y-P*	2 1/2	36 1/4	8 7/8	13 1/8	15 7/8	14 3/8	3	5 1/4	3 1/2	6 1/4	2 7/8	3	8 5/8	6 5/8	130
T3-3(XX)Y-P*	3	46 3/8	9 1/4	18 3/8	20 3/4	14 3/4	4	6 1/8	5	5 1/2	3 1/2	4	9	7	160
T4-3(XX)Y-P*	4	49 1/2	10 5/8	22 1/8	24 5/8	17 3/4	4	6 3/8	6	7 1/4	4 1/2	5	10 1/4	9 1/8	200
T5-3(XX)Y-P*	5	61	11 1/4	25 1/4	27 3/4	19 3/4	4	6 1/8	7	6 1/2	5 9/16	6	11	10	260
T6-3(XX)Y-P*	6	73 3/4	11 1/4	25 1/4	27 3/4	19 3/4	5 3/4	**	7 1/4	6 3/4	6 5/8	6	11	10	275
T8-3(XX)Y-P*	8	90 3/4	13 1/4	36 1/2	38 1/4	25 7/8	6	9 1/2	10	15 3/8	8 5/8	8	14	13 1/8	500

All dimensions are in inches, Information subject to change without notice.

\*\* - For T6-3(XX)Y-P\* the (G) dimension for outside ports is 7 3/8, (G) dimension for center port is 14 7/8 to allow for Morris couplings.